

JC10 Rec'd PCT/PTO 25 FEB 2002

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER BERVOETS=2
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371		U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 10/069372
INTERNATIONAL APPLICATION NO. PCT/NL00/00590	INTERNATIONAL FILING DATE 24 August 2000	PRIORITY CLAIMED 25 August 1999
TITLE OF INVENTION SYSTEM FOR DETERMINING THE POSITION OF A TRANSPONDER		
APPLICANT(S) FOR DO/EO/US Alfonsus Maria BERVOETS		
<p>Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:</p> <ol style="list-style-type: none"> <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371 <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1). <input checked="" type="checkbox"/> The US has been elected in a Demand by the expiration of 19 months from the priority date (PCT Article 31) <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> <input type="checkbox"/> is attached hereto (required only if not transmitted by the International Bureau) <input checked="" type="checkbox"/> has been communicated by the International Bureau <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US) <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)). <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ol style="list-style-type: none"> <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). <input type="checkbox"/> have been communicated by the International Bureau. <input type="checkbox"/> have not been made, however, the time limit for making such amendments has NOT expired. <input checked="" type="checkbox"/> have not been made and will not be made. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)) <input type="checkbox"/> An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). <p>Items 11. to 16. below concern document(s) or information included:</p> <ol style="list-style-type: none"> <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98. <input type="checkbox"/> An Assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included <input type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. <input type="checkbox"/> A substitute specification <input type="checkbox"/> A change of power of attorney and/or address letter. <input checked="" type="checkbox"/> Other items or information <ul style="list-style-type: none"> <input checked="" type="checkbox"/> Courtesy copy of the International Application as filed. <input checked="" type="checkbox"/> Courtesy copy of the first page of the International Publication (WO 01/14905) <input checked="" type="checkbox"/> Courtesy copy of the International Preliminary Examination Report. There were no annexes. <input checked="" type="checkbox"/> Formal drawings, 2 sheets, Figures 1-6 <input checked="" type="checkbox"/> Courtesy Copy of the International Search Report <input checked="" type="checkbox"/> Application Data Sheet <p><input checked="" type="checkbox"/> The application is (or will be) assigned to: AMB-IT HOLDING B.V., whose address is Herenweg 29A, NL-2105 MB HEEMSTED, The Netherlands.</p>		

U.S. APPLICATION NO. (If known, see 37 CFR 1.5) 10/069372	International Application No. PCT/NL00/00590	Attorney's Docket No. BERVOETS=2
---	--	--

<p>17. [xx] The following fees are submitted</p> <p>BASIC NATIONAL FEE (37 CFR 1.492 (a)(1) –(5): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO..... \$1040.00</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00</p> <p>International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00</p> <p>International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00</p> <p style="text-align: center;">ENTER APPROPRIATE BASIC FEE AMOUNT =</p> <p>Surcharge of \$130.00 for furnishing the oath or declaration later than [] 20 [X] 30 months from the earliest claimed priority date (37 CFR 1.492(e))</p> <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:30%;">Claims as Originally Presented</th> <th style="width:15%;">Number Filed</th> <th style="width:15%;">Number Extra</th> <th style="width:15%;">Rate</th> <th style="width:15%;"></th> </tr> <tr> <td>Total Claims</td> <td>9 - 20</td> <td></td> <td>X \$18.00</td> <td>\$</td> </tr> <tr> <td>Independent Claims</td> <td>1 - 3</td> <td></td> <td>X \$84.00</td> <td>\$</td> </tr> <tr> <td colspan="4">Multiple Dependent Claims (if applicable)</td> <td>+\$280.00</td> </tr> </table> <p style="text-align: center;">TOTAL OF ABOVE CALCULATIONS =</p> <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:30%;">Claims After Post Filing Prel Amend</th> <th style="width:15%;">Number Filed</th> <th style="width:15%;">Number Extra</th> <th style="width:15%;">Rate</th> <th style="width:15%;"></th> </tr> <tr> <td>Total Claims</td> <td>- 20</td> <td></td> <td>X \$18 00</td> <td>\$</td> </tr> <tr> <td>Independent Claims</td> <td>- 3</td> <td></td> <td>X \$84 00</td> <td>\$</td> </tr> </table> <p style="text-align: center;">TOTAL OF ABOVE CALCULATIONS =</p> <p>Reduction of ½ for filing by small entity, if applicable. Applicant claims small entity status. See 37 CFR 1.27.</p> <p style="text-align: right;">SUBTOTAL =</p> <p>Processing fee of \$130.00 for furnishing the English translation later than [] 20 [] 30 months from the earliest claimed priority date (37 CFR 1.492(f)).</p> <p style="text-align: right;">TOTAL NATIONAL FEE =</p> <p>Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) \$40.00 per property +</p> <p style="text-align: right;">TOTAL FEES ENCLOSED =</p> <table border="1" style="width:100%; border-collapse: collapse;"> <tr> <td style="width:60%;"></td> <td style="width:20%; text-align: right;">Amount to be:</td> <td style="width:20%;"></td> </tr> <tr> <td></td> <td style="text-align: right;">refunded</td> <td>\$</td> </tr> <tr> <td></td> <td style="text-align: right;">charged</td> <td>\$</td> </tr> </table>				Claims as Originally Presented	Number Filed	Number Extra	Rate		Total Claims	9 - 20		X \$18.00	\$	Independent Claims	1 - 3		X \$84.00	\$	Multiple Dependent Claims (if applicable)				+\$280.00	Claims After Post Filing Prel Amend	Number Filed	Number Extra	Rate		Total Claims	- 20		X \$18 00	\$	Independent Claims	- 3		X \$84 00	\$		Amount to be:			refunded	\$		charged	\$	<p>CALCULATIONS PTO USE ONLY</p>	
Claims as Originally Presented	Number Filed	Number Extra	Rate																																														
Total Claims	9 - 20		X \$18.00	\$																																													
Independent Claims	1 - 3		X \$84.00	\$																																													
Multiple Dependent Claims (if applicable)				+\$280.00																																													
Claims After Post Filing Prel Amend	Number Filed	Number Extra	Rate																																														
Total Claims	- 20		X \$18 00	\$																																													
Independent Claims	- 3		X \$84 00	\$																																													
	Amount to be:																																																
	refunded	\$																																															
	charged	\$																																															

- a. [] A check in the amount of \$_____ to cover the above fees is enclosed
- b. [X] Credit Card Payment Form (PTO-2038), authorizing payment in the amount of \$ 1,270.00, is attached
- c. [] Please charge my Deposit Account No. **02-4035** in the amount of \$_____ to cover the above fees.
 A duplicate copy of this sheet is enclosed.
- d. [XX] The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment
 to Deposit Account No. **02-4035**. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.


SEND ALL CORRESPONDENCE TO:

BROWDY AND NEIMARK, P.L.L.C.
624 NINTH STREET, N.W., SUITE 300
WASHINGTON, D.C. 20001

TEL: (202) 628-5197

FAX: (202) 737-3528

Date of this submission: **February 25, 2002**

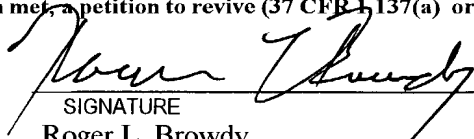
 SIGNATURE
Roger L. Browdy
 NAME
25,618
 REGISTRATION NUMBER

2/PRTS

10/069372

WO 01/14905

JC19 Rec'd PCT/PTO 25 FEB 2002
PCT/NL00/00590

System for determining the position of a transponder

5 The invention relates to a system for determining the position of a transponder which moves along a course.

STATE OF THE ART

Such systems are known from the state of the art. In these systems in general the object is to determine the position in the direction of movement whereby field strength
10 measurements are used. An example thereof is described in US5621411.

In certain cases it is desirable to know the position of the transponder in a direction transverse to the course. An example thereof are the toll-installations on multi lane auto-routes. Therewith it is important to make clear in which lane a vehicle is present before the necessary data are exchanged with said vehicle in relation to the toll charging.
15 ing. Charging toll from a vehicle in a neighbouring lane has to be prevented.

An example of means for determining in which lane a vehicle is present in the neighbourhood of a toll charging installation is described in US5406275. In this known system one detection station per lane is used whereby care has to be taken that each detection station almost exclusively detects its own lane and causes as less as possible
20 disturbance in the neighbouring detection stations. In this publication also the above mentioned distance measurements by means of field strength measurements are described.

This prior art system is based on clearly distinguishable lanes and has per lane separate hardware necessary to perform the required measurements.

25 Another example of circumstances whereby it is often desirable to know the position of the transponder in a direction transverse to the course along which the transponder is moving is formed by auto races, races with karats, skelters, bicycles of other vehicles, horseraces, houndraces and all other races which take place on a specific course. Especially at those places which are not in view of an observer it might be im-
30 portant to know which contestant has the innerlane, the outerlane or moves on the middle of the road, etc.

OBJECT OF THE INVENTION

The object of the invention is now to determine the position of the transponder in transversal direction in relation to a course without the necessity to divide the course in transversal direction in clearly distinguished and electromagnetically screened lanes which each should have its own measuring station.

BRIEF DESCRIPTION OF THE INVENTION

The above mentioned object is fulfilled by a system for determining the position of a transponder, which transmits a signal and moves along a route with at least a measuring station comprising antenna means for receiving said signal at least at two measuring points positioned at the two outer points of a line segment which crosses the course in a perpendicular manner, whereby said measuring station comprises:

- a first receiver for receiving said signal through said antenna means at the one measuring point and
- a second receiver for receiving said signal through said antenna means at the other measuring point,
- high frequency phase measuring means measuring the phase difference between the output signal of the first receiver and the output signal of the second receiver,
- evaluation means which, based on the measured phase difference, determines where the transponder passes said line segment.

In case the transponder is moving exactly in the middle of the road then at both measuring points signal with equal phase will be received. If the transponder is present more to the left side of the course then a predetermined phase difference will be measured. If the transponder is moving more to the right side of the course then a predetermined opposite phase difference will be measured.

Depending on the applied frequency and the width of the course it is possible that a number of phase zeros will be measured spread over the length of the line segment between both measuring points. That makes it impossible for the evaluation unit to determine the position in an unambiguous manner.

There are a number of possibilities to eliminate this unambiguity. In the first place one could think of lowering the signal frequency. However, in general the applied frequencies are bounded to various national and international agreements which in

general prevent a variation of the signal frequency. However, applying a modulation is possible whereby a relatively low modulation frequency can be selected. In that case not the signal itself but the modulation frequency is used for the phase measuring.

A system which is embodied according to this principle has the characteristic
5 that the transponder transmits a modulated signal, that the first receiver is followed by a first demodulator for demodulating the received signal, that the second receiver is followed by a second demodulator for demodulating the received signal, and that low frequency phase measuring means measure the phase difference between the output
10 signal of the first demodulator and the output signal of the second demodulator. In this system not the phase of the carrier wave but the phase of the modulating signal is measured of which the frequency is much lower and by means of which a line segment with a larger length (and therefore a course with a larger width) can be covered unambiguously without a number of zero phase measuring points.

A disadvantage of the above mentioned system may be that the accuracy of the
15 location determination based on relatively low frequency modulation signal is lower than in case the higher frequency signals would be used. To solve said problem, it is preferred to combine both embodiments such that the evaluation means use the output signal of the low frequency phase measuring means for "coarse" position determination whereas the output signal of the high frequency phase measuring means is used for
20 "fine" position determining.

In principle various types of modulation can be used, amplitude modulation, frequency modulation, phase modulation, etc. A type of modulation which needs only very simple circuits to obtain a properly functioning system is amplitude modulation whereby the modulation signal is a pulse series by means of which the amplitude of the
25 carrier wave is modulated between 0% and 100%. In other words the transponder transmits signal trains.

Another possibility to remove the uncertainty as resulting from various zero crossings is reducing the line segment and apply a series circuit of a number of smaller line segments. The length of each smaller line segment has to be such that
30 within each line segment an unambiguous measurement can be performed. To be able to determine which line segment will supply the correct measuring value use can be made of a field strength measurement in each of the measuring points. The line seg-

ment which is bounded by those measuring points which together have the strongest sum signal is selected.

A system functioning according to this principle has the characteristic that between both ends of said line segment another N measuring points are realised such that the line segment is divided by $N+2$ measuring points into $N+1$ segments each having a length which is small enough to realise an unambiguous measurement within said segment, whereby the $N+2$ measuring points are connected to $N+2$ receivers, the output of each of said receivers is connected to a field strength measuring means, the output signals of all field strength measuring means are evaluated in a comparison circuit, which comparison circuit transfers the output signals of those two receivers having together the largest field strength, to a phase comparator to be mutually compared whereafter the resulting output signal of the phase comparator controls an evaluation unit.

Instead of field strength measurements a combination of carrier measurements and modulation signal measurements is conceivable. In that case the system comprises an first elongated loop antenna which is used for p-hase measurements of the modulation signals at the end points in the above described manner. The result thereof is a position with a relative low accuracy. The system comprises in that case a second antenna having a series circuit of small loop antennas which are used each for a phase measurement based on the carrier signal at the ends of each small loop antenna. The position with low accuracy is used to select one of the small loup antennas. The phase measurement on this selected small loop antenna results into a position with a relatively high accuracy. A disadvantage of this embodiment is the rather complicated antenna system, necessary for performing the measurements.

A further preferred embodiment of the system has according to the invention the characteristic that the measurement is repeated a number of times in a row, whereafter the results are interpolated such that from the results the track can be derived which was followed by the transponder within said course.

INDICATION OF THE FIGURES

The invention will be explained in more detail hereinafter with reference to the attached drawings.

Figure 1 illustrates schematically a perspective view on a part of a course, whereby at both sides of the course a receiving antenna of a measuring station is installed.

Figure 2 illustrates a top view on a measuring station with a loop shaped antenna on or in the surface of the course.

Figure 3 illustrates another embodiment of the electronics in the measuring station.

Figure 4 illustrates an embodiment whereby the modulation signal is used for "course" position determination and the high frequency carrier signal is used for "fine" position determination.

Figure 5 illustrates schematically an embodiment in which use is made of an antenna consisting of the series circuit of a number of loops.

Figure 6 illustrates schematically the exact route of a vehicle as function of a number of measurements performed by the system.

FIGURE DESCRIPTION

Figure 1 illustrates schematically a part of a course 10, e.g. part of a road, along which a transponder 12 is moving in the direction of the arrow 14. The transponder 12 will in a practical case be attached in or on an automobile, a motorbike or another vehicle, or to a human or animal, and will thereby be moved along the course 10 in the indicated direction.

At a number of places along the course measuring means are installed by means of which the position of the transponder 12 in transversal direction can be determined. In figure 1 such a measuring post is illustrated comprising an antenna 16 at one side of the road and an antenna 18 at the other side of the road, an electronics unit 20 which through a line 22 is connected to the antenna 16 and through a line 24 is connected to the antenna 18.

During operation the transponder 12 will transmit with short intermediate distances a signal which could be a continuous sinewave with predetermined frequency but could also be a modulated carrier wave. Preferably in the last mentioned case the carrier wave is modulated by a pulse series of significant lower frequency so that "signal trains" are formed.

For the coming part of this description it is assumed that the transponder transmits a continuous and preferably sinusoidal signal. This transmitted signal is received by both antennas 16 and 18. The received signals are transferred through lines 22 and 24 to the electronics units 20 in which the signals are phase compared with each other.

5 If it is assumed furthermore that the signal lines 22 and 24 have the same length then it will be clear that, in case the transponder 12 is on the middle of the road, and the distance between the transponder 12 and the antenna 16 is identical to the distance between the transponder 12 and the antenna 18, both received signals in the electronics circuit 20 have the same phase. A phase difference 0 indicates therefore that the
10 transponder 12 is in the middle of the road (or at least can be there). In case the transponder 12 is deviating from the middle of the road to the left then between both received signals a certain phase difference will be developed. If the transponder 12 deviates from the middle of the road into the right direction then in both received signals an opposite phase difference will be developed. If both lines 22 and 24 are not exactly
15 of the same length then this will cause a fixed phase difference for which compensation can be provided as will be clear for the expert in this field. A similar note can be made by other embodiments of the system which will be described hereinafter.

A disadvantage of the schematically illustrated system in figure 1 is that this system can be realised in practice only for rather high carrier frequencies. Only then the
20 dimensions of the antennas 16 and 18 will be such they are allowable in practice. Many of the momentarily used transponder applications, for instance for tracking vehicles along certain road sections, make use of much lower carrier frequencies. In that case it is preferred to use another antenna configuration as schematically illustrated in figure 2.

25 In figure 2 the course in top view is indicated in general by 30. In an imaginary coordinate system the direction of movement 14 of the transponder 12 equals the Y-direction. Transversal to this direction, in other words in the width direction of the course 30 the X-direction is assumed whereby in the example of figure 2 the lower side of the course overlaps $X=0$ whereas the upper side edge of the course overlaps $X=B$,
30 whereby B is the width of the course 30. On the trajectory a loop shaped antenna 32 is installed comprising two long parallel conductors extending at short distance of each other which at $X=0$ and $X=B$ are connected by short transversal conductors. The short transversal conductors are through the conduits 34 and 36 in connection with the elec-

tronic unit 38. In this electronic unit 38 two receivers 40 and 42 are positioned as well as a phase measuring unit 44 and an evaluation unit 46.

The signals measured at the ends of the loop antenna 32 are through lines 34 and 36 supplied to the receivers 40 and 42 and there amplified up to a desired level. The
5 output signals of the receivers 40 and 42 are in a phase measuring unit 44 compared in phase with each other resulting into a phase output signal. This phase output signal is supplied to an evaluation unit 46 which derives an X-value from this phase signal. If the transponder is located exactly in the middle of the road then the unit 46 will provide a value $X=B$ if the transponder is located more to the lower side of the road then the
10 unit 46 will for instance provide the signal $X=X_1$, whereby $X_1 < \frac{1}{2}B$, whereas if the transponder 12 is more located to the upperside the unit 46 can supply for instance a signal $X=X_2$ whereby $X_2 > \frac{1}{2}B$ is.

Dependent on the selected carrier wave frequency and dependent on the width B of the course it will happen that a number of 0 points are developing on the loup shaped
15 antenna 32 so that the measurement is not unambiguous anymore. To provide a remedy it is for instance possible to make use of a modulated carrier wave instead of a continuous carrier wave whereby for the phase measurement not the carrier wave but the modulation signal with a much lower frequency is used. The electronics unit 38a is in that case extended by 2 demodulators in the way, as schematically is illustrated in
20 figure 3. A first demodulator 48 is installed between the receiver 40 and the phase measuring unit 44 whereas a second demodulator 50 can be placed between the receiver 42 and the phase measuring unit 44. By adding these both demodulators 48 and 50 in the phase measuring unit 54 the phase difference between the modulation signals is measured. Because thereby signals with a very low frequency are involved it is now
25 possible by a suitable selection of the frequency to reduce the number of zero points in the output signal of the unit 44 to only one. The evaluation unit 46 is able therewith to indicate unambiguously within the course $X=0$ and $X=B$ where the transponder 12 is located.

A disadvantage of the use of relatively low frequency modulation signals can be
30 that the therewith-obtained accuracy in the position determination is lower than in case the higher frequency carrier wave is applied. In the embodiment which is schematically illustrated in figure 4 the advantages of both embodiments are combined. The elongated loop antenna which is present in or on the course is in that case indicated by 70. The

ends of the antenna 70 are through lines 72 and 74 connected with the respective receiver 76 and 78. Each of the receivers supplies a high frequency modulated signal to one of the respective demodulators 80 and 82. The lower frequent modulation signals at the outputs of the demodulators 80 and 82 are supplied to the inputs of the phase
5 comparator 84.

The high frequency output signals of the receivers can be compared directly with each other in the phase comparator 86. As indicated above this may lead to a non-unambiguous location determination. By combining the output signal of the phase comparator 84, by means of which the position is "coarse" indicated however not unambiguously, with the output signal of the phase comparator 86 it will be clear that within
10 the "coarse" determination a "fine" tuning can be applied. The evaluation unit 88 therefore provides as a result a location determination with high accuracy.

Above one has assumed that the usual antenna is present in or on the surface of the road. That is however not necessary. The transponder can be embodied also as a
15 vertical standing loop or window antenna. Also an antenna at a certain height above the road such, that the transponder can move underneath the antenna, can be applied.

Another possibility to eliminate the ambiguity in the outputsignal of the phase measuring unit 44 is illustrated in figure 5. Instead of an elongated loop shaped antenna 32 such as in figure 2 or figure 4 in this case use is made of a series circuit of a number
20 of much shorter loop antennas 52a, 52b, 52c,... Each of these antennas is through an own line 54a, 54b, 54c.... connected to an own receiver 56a, 56b, 56c,... in the electronic unit 38c. The outputs of the various receivers are connected to a series of field strength meters 58a, 58b, 58c,... which supply output signals to a comparison circuit 60. All these output signals together form a curve which indicates where, above which
25 small antenna 52a, 52b, 52c,... the transponder has to be found. The comparison circuit 60 in fact establishes which two adjacent receivers have the largest summing amplitude of the received signals and controls the series of switches of 62a, 62b, 62c, such that only the output signals of these two selected receivers are transferred to the phase measuring circuit 64. The outputsignal of the phase measurement circuit 64 is
30 taken into account by the evaluation circuit 66 together with the positions of the switches 62a, 62b, 62c,...

Above it is assumed that the transponder is an active transponder which transmits signal trains with regular intervals without being activated thereto by an externally re-

ceived signal. The invention however can be applied with good results in combination with passive transponders which become only active after reception of an activated signal and will transmit then a response signal.

Finally it is remarked that in the above description a line segment is assumed which is perpendicular to the track direction and which has its endpoints at the edges of the track. A line segment which is not ideally perpendicular but makes a small angle with the direction of the track such as caused by not accurately setting of the line segment can appear easily in practice and will in general not lead to a grave measuring error. Only if the angle is relatively large (larger than 10 degrees) then this angle should be taken into account in the evaluating means.

1. System for determining the position of a transponder, which transmits a signal and moves along a route with at least a measuring station comprising antenna means for receiving said signal at least at two measuring points positioned at the two outer points of a line segment which crosses the course in a perpendicular manner, whereby said measuring station comprises:

- a first receiver for receiving said signal through said antenna means at the one measuring point and
- a second receiver for receiving said signal through said antenna means at the other measuring point,
- high frequency phase measuring means measuring the phase difference between the output signal of the first receiver and the output signal of the second receiver,
- evaluation means which, based on the measured phase difference, determines where the transponder passes said line segment.

2. System according to claim 1, characterized in that the transponder transmits a modulated signal, that the first receiver is followed by a first demodulator for demodulating the received signal, that the second receiver is followed by a second demodulator for demodulating the received signal, and that low frequency phase measuring means measure the phase difference between the output signal of the first demodulator and the output signal of the second demodulator.

3. System according to claim 1 and 2, characterized in that the evaluation means use the output signal of the low frequency phase measuring means for "coarse" position determination whereas the output signal of the high frequency phase measuring means is used for "fine" position determining.

4. System according to one of the claims 2 or 3, characterized in that the modulated signal is obtained by amplitude modulation whereby the modulation signal is a pulse

series by means of which the amplitude of the carrier wave is modulated between 0% and 100%.

5 5. System according to claim 1, characterized in that between both ends of said line segment another N measuring points are realised such that the line segment is divided by N+2 measuring points into N+1 segments each having a length which is small enough to realise an unambiguous measurement within said segment, whereby the N+2 measuring points are connected to N+2 receivers, the output of each of said receivers is connected to a field strength measuring means, the output signals of all field strength
10 measuring means are evaluated in a comparison circuit, which comparison circuit transfers the output signals of those two receivers having together the largest field strength, to a phase comparator to be mutually compared whereafter the resulting output signal of the phase comparator controls an evaluation unit.

15 6. System according to one of the preceding claims 1-4, characterized in that the system comprises an elongated loop antenna consisting of two parallel antenna conductors extending a short mutual distance and having a length equal to the length of said segment, which antenna conductors are connected at their ends where the measuring points are formed.

20

7. System according to claim 5, characterized in that the antenna is built as a series circuit of N+1 small loop antennas each comprising two parallel antenna conductors extending at short mutual distance of which the ends are interconnected, which loop antennas are in length direction coupled to each other.


25




8. System according to one of the preceding claims, characterized in that the measurement is repeated a number of times in a row, whereafter the results are interpolated such that from the results the track can be derived which was followed by the transponder within said course.

Alfred Russel Wallace

45

1/2

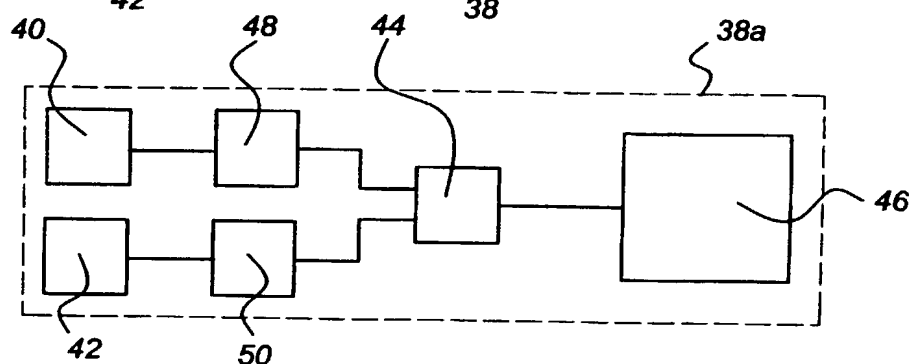

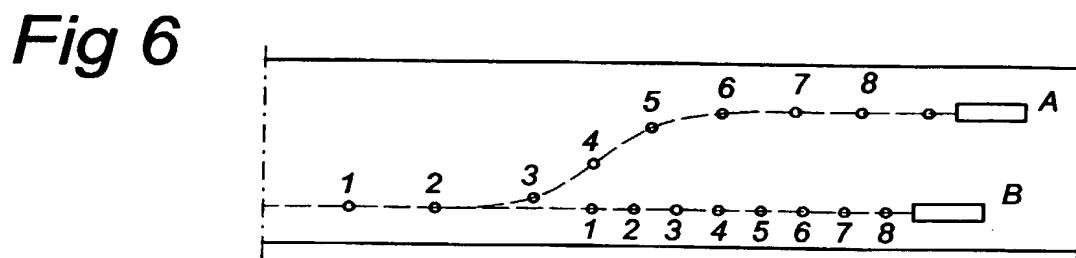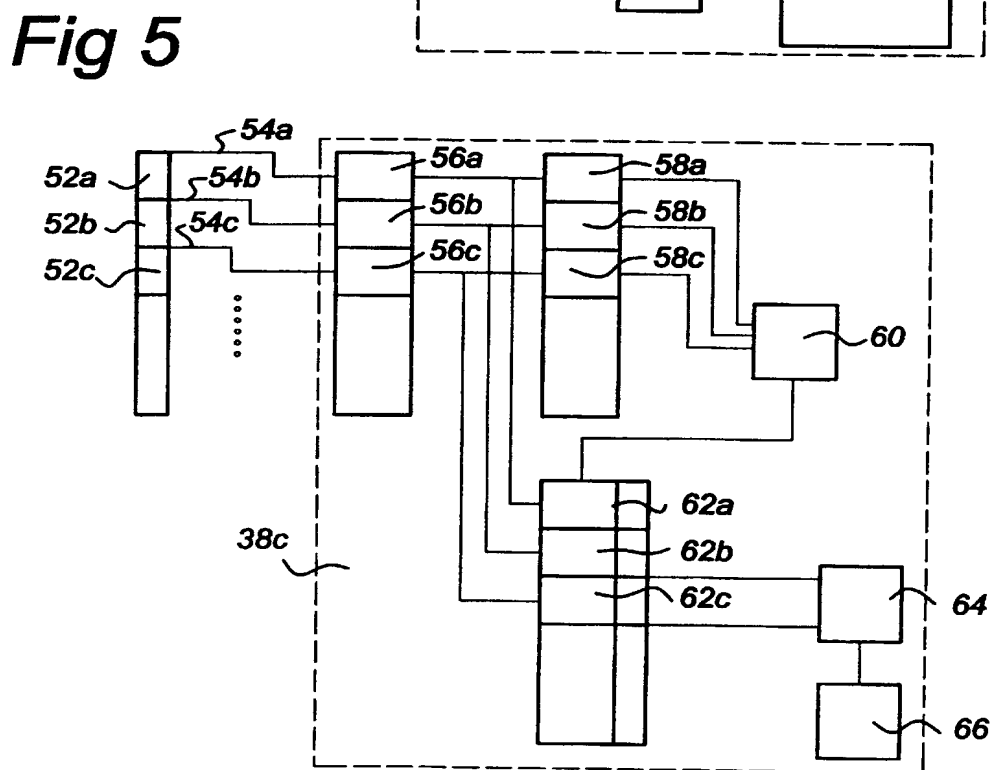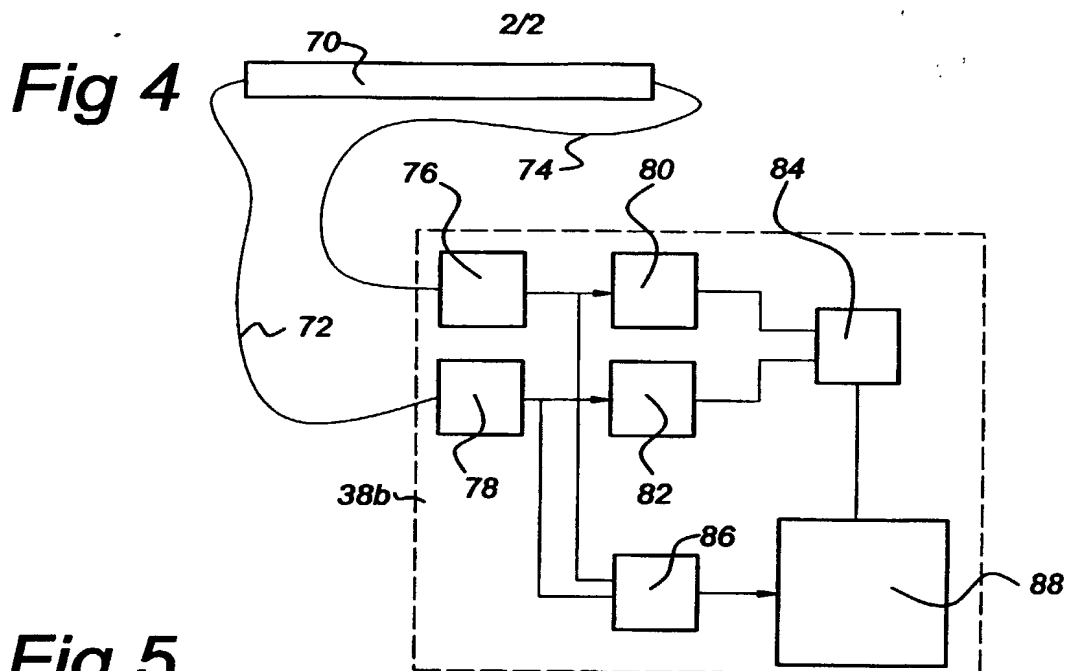

COMBINED DECLARATION AND POWER OF ATTORNEY

(ORIGINAL DESIGN, NATIONAL STAGE OF PCT OR CIP APPLICATION)

As a below named inventor, I hereby declare that

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

System for determining the position of a transponder

the specification of which: (complete (a), (b) or (c) for type of application)

REGULAR OR DESIGN APPLICATION

- a. ☐ is attached hereto.
b. ☐ was filed on _____ as Application
Serial No. _____ and was amended on _____
(if applicable)

PCT FILED APPLICATION ENTERING NATIONAL STAGE

- c. ☒ was described and claimed in International application No. _____
PCT/NL00/00590 filed on 24 August 2000
and as amended on _____ (if any)

ACKNOWLEDGEMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, paragraph 1.56(a).

In compliance with this duty there is attached an information disclosure statement 37 CFR 1.97

PRIORITY CLAIM

I hereby claim foreign priority benefits under Title 35. United States Code paragraph 119 of any foreign application (s) for patent of inventor's certificate listed below and have also identified below any foreign application for patent of inventor's certificate having a filing date before that of the application on which priority is claimed.

1.431.064.372 00244238

(complete (d) or (e))

- d. ☐ no such applications have been filed
e. ☒ such applications have been filed as follows

**EARLIEST FOREIGN APPLICATION(S), IF ANY FILED WITHIN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO SAID APPLICATION**

Country	Application Number	Date of filing (day, month, year)	Date of Issue (day, month, year)	Priority claimed
The Netherlands	1012907	25 August 1999		Yes

**ALL FOREIGN APPLICATION(S), IF ANY FILED MORE THAN 12 MONTHS
(6 MONTHS FOR DESIGN) PRIOR TO SAID APPLICATION**

CONTINUATION-IN-PART

(Complete this part only if this is a continuation-in-part application)

I hereby declare claim the benefit under Title 35, United States code, paragraph 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claim of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, paragraph 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, paragraph 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.) (Filing date) (Status) (patented, pending, abandoned)

(Application Serial No.) (Filing date) (Status) (patented, pending, abandoned)

POWER OF ATTORNEY

I hereby appoint the following attorneys, with full power of substitution, association, and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.


7
SHERIDAN NEIMARK, REG. NO. 20,510 ROGER L. BROWDY, REG. NO. 25,618 ANNE M. KORNIBAU, REG. NO. 25,884
NORMAN J. LATKER, REG. NO. 19,963 IVER P. COOPER, REG. NO. 28,005 ALLEN C. YUN,* REG. NO. 37,971
JAY M. FINKELSTEIN, REG. NO. 21,082 *PATENT AGENT

ADDRESS ALL CORRESPONDENCE TO BROWDY AND NEIMARK, P.L.L.C. 624 Ninth Street, N.W. Washington, D.C. 20001-5303	DIRECT ALL TELEPHONE CALLS TO: BROWDY AND NEIMARK, P.L.L.C. (202) 628-5197 Customer Number 001444
--	--

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that wilful false statements and the like so made are punishable by fine or imprisonment, or both under Section 1001 of Title 18 of the United States Code and that such wilful false statements may jeopardize the validity of the application or any patent issued thereon.

Inventor's signature

Signature




Country of Citizenship: The Netherlands

NLX

Post Office Address: Duindoornlaan 32, NL-2116 TL BENTVELD, The Netherlands

Inventor's signature _____



Country of Citizenship: The Netherlands

BE X

Post Office Address: Jagerspad 3, B-3910 NEERPELT, Belgium

CHECK PROPER BOX(ES) FOR ANY ADDED PAGE(S) FORMING A PART OF THIS DECLARATION